

Post-Construction Stormwater Management Inspection & Maintenance PROGRAM MANUAL

Virginia Highlands Community College
100 VHCC Drive
Abingdon, VA 24210

June 2014

TABLE OF CONTENTS

1.0	INTRODUCTION AND PURPOSE	1
2.0	DOCUMENTATION REQUIREMENTS	2
2.1	Construction Record Drawings	2
2.2	BMP Inspection Forms	2
2.3	BMP Maintenance Follow-up Forms.....	2
2.4	Annual Reporting to DEQ.....	3
3.0	INSPECTION FREQUENCY	4
4.0	STORMWATER MANAGEMENT FACILITIES	5
4.1.1	Dry Detention.....	5
5.0	BMP INSPECTION FORMS	6
5.1	Stormwater Management Facility Information	6
5.2	Inspection Elements.....	6
5.2.1	Contributing Drainage Area	6
5.2.2	Pretreatment.....	7
5.2.3	Inlets.....	7
5.2.4	Sediment Forebay	7
5.2.5	Vegetation.....	7
5.2.6	Emergency Spillway	7
5.2.7	BMP Outfall	8
5.2.8	Principle Spillway	8
5.2.9	Berm/Embankment.....	8
5.2.10	Low Flow Orifice.....	8
5.2.11	Miscellaneous	9
6.0	FACILITY MAINTENANCE	10
6.1	Routine Maintenance	10
6.2	Corrective Maintenance	10
7.0	FACILITY MAINTENANCE	11
7.1	Routine Maintenance	11
7.2	Corrective Maintenance	11

APPENDICES

- Appendix A: VHCC Post-Construction Stormwater Facility Mapping
- Appendix B: VHCC Post-Construction Stormwater Facility Inventory
- Appendix C-1: Stormwater Facility Inspection Forms
- Appendix C-2: BMP Maintenance Follow-up Form
- Appendix D: New Stormwater Facility Form

ACRONYMS

BMP	Best Management Practice
CH	Virginia BMP Clearinghouse
CPESC	Certified Professional in Erosion and Sediment Control
CWA	Clean Water Act
DEQ	Virginia Department of Environmental Quality
EPA	Environmental Protection Agency
IDDE	Illicit Discharge Detection and Elimination
MEP	Maximum Extent Practicable
MS4	Municipal Separate Storm Sewer System
NEPA	National Environmental Policy Act
NPDES	National Pollutant Discharge Elimination System
SWPPP	Stormwater Pollution Prevention Plan
TMDL	Total Maximum Daily Load
VPDES	Virginia Pollutant Discharge Elimination System
VSMP	Virginia Stormwater Management Program

1.0 INTRODUCTION AND PURPOSE

Land development disturbs stable vegetated landscapes and increases impervious area, which in turn increases the stormwater runoff from the land surface. Development also increases pollutant concentrations in stormwater runoff, as pollution associated with development is deposited onto hardened surfaces and carried by runoff into nearby water bodies. Such pollutants include sediment, suspended solids, nutrients, pesticides, herbicides, heavy metals, chlorides, hydrocarbons, other organics, and bacteria. To remove pollutants from stormwater runoff, structures are installed to reduce the pollutant loads using various processes. These stormwater structures are called Best Management Practices, commonly referred to as BMPs. They are designed to reduce flooding, remove pollutants and decrease the amount of runoff from stormwater that ultimately flows to our creeks, streams, and rivers. Ensuring that these facilities function correctly requires long-term inspections and maintenance.

This manual presents the standard protocol for Post-Construction Stormwater Management Inspection and Maintenance procedures, and satisfies the written procedures for long-term operation & maintenance (O&M) requirements of small municipal separate storm sewer system (MS4) General Permit. As a regulated MS4, Virginia Highlands Community College (VHCC) is obligated to meet the requirements of the MS4 General Permit (General Permit). The General Permit is issued through the Virginia Pollutant Discharge Elimination System (VPDES), which is administered at the state level by the Virginia Department of Environmental Quality (DEQ). The MS4 program is part of the Federal National Pollutant Discharge Elimination System (NPDES), which is authorized through the Clean Water Act and regulated through the US Environmental Protection Agency (EPA).

VHCC's Post-Construction Stormwater Management Program, which is a series of written procedures in this manual, ensures adequate long-term operation and maintenance of BMPs for VHCC.

VHCC's Post-Construction Stormwater Management Program includes three distinct components:

- **Documentation** – Procedures to document efforts related to the Post-Construction Stormwater Management inspection and maintenance procedures are outlined in Section 2.0 of this manual.
- **Inspections** – Discussion of Post-Construction Stormwater Management facility types and components that require inspections are outlined in Section 4.0 of this manual. Instruction for the Post-Construction Stormwater Management Facility inspections are outlined in Section 5.0 of this manual. Stormwater facility mapping, stormwater facility inventory, inspections forms and new facility forms that support inspection efforts are provided in the Appendices.
- **Maintenance** – Discussion of typical maintenance requirements are provided in Section 6.0 of this manual.

2.0 DOCUMENTATION REQUIREMENTS

Documentation of Post-Construction Stormwater Management efforts is critical for demonstrating compliance with the General Permit. All documentation related to Post-Construction Stormwater Management is required to be maintained on file and available upon request for a minimum of 5 years and include:

- Construction Record Drawings (As-builts);
- Completed BMP Inspection Forms; and
- Completed BMP Maintenance Follow-up Forms, when applicable.

Documentation listed above is incorporated into annual reporting requirements required by the General Permit.

2.1 Construction Record Drawings

Upon completion of the construction of a stormwater BMP, a record drawing should be obtained by the college of the facility. The record drawing, or as-built, serves the purpose of:

- Ensuring the BMP was built per the design plans and
- Serving as a reference over time for to assist with long-term inspection and maintenance.

Ideally, the record drawing would also prescribe inspection frequency and discuss critical maintenance needs. Information such as the design of the outfall structure, elevations, and vegetation plans will allow VHCC to restore the BMP to its original design, when necessary. Sometimes an issue with a BMP may not be evident during an inspection, such as if the facility should be holding water or be dry. A record drawing can be referenced to make that determination. Examples include, discovering the surface of an infiltration basin or a low-flow orifice being clogged, resulting in ponding. The intended function, such as time for water to drawdown out of the basin, may not be known until the record drawing is reviewed.

In some cases, especially with older facilities, a record drawing may not be available. In these cases, the Virginia BMP Clearinghouse can be referenced for additional information regarding inspections and maintenance of each type of stormwater BMP. The Clearinghouse can be found at:

<http://www.vwrrc.vt.edu/swc/NonProprietaryBMPs.html>

2.2 BMP Inspection Forms

The General Permit requires BMPs be inspected annually by VHCC, at a minimum. Completion of comprehensive inspection forms assist the inspector to:

- Inspect each critical component of the facility;
- Identify maintenance needs; and
- Properly document inspections to demonstrate compliance to the General permit.

BMP Inspection forms provided in Appendix C-1 have been developed to assist the inspector, and unique forms are provided dependent on the type of BMP being inspected. In addition to completion of the inspection forms, where applicable, a BMP Maintenance Form should be completed as described in the next Section. Inspection forms are discussed in additional detail in Section 5 of this Manual.

2.3 BMP Maintenance Follow-up Forms

In the case that issues are identified on BMP Inspection Forms, it is important to ensure the necessary maintenance is performed in a timely manner. It is critical that documentation demonstrating the

completion of the maintenance is maintained on file to demonstrate compliance. This documentation should be provided on the BMP Maintenance Follow-up Form in Appendix C-2. This Manual does not establish time frames for completing maintenance needs identified during inspections. Time frames shall be designated by the Superintendent Buildings and Grounds, or designee, and be prioritized based on the nature of the maintenance need. High prioritization should be given to situations that include issues with:

- BMP functionality regarding the potential to cause flooding (e.g. structural integrity of the embankment or clogged outflow structures)
- BMP functionality regarding the inability to remove pollutants as designed (e.g. clogged infiltration surface, dead vegetation)
- BMP acting as a source of sediment (exposed soils requiring stabilization)

In the case of Corrective Maintenance, as identified in Section 6.2, a timeframe designation should be carefully considered by the Superintendent Buildings and Grounds. In some cases, repairs may be necessary as soon as possible.

The Maintenance Follow-up Form is separated in to two sections. The first section should be completed by the individual performing the BMP inspection. This section identifies the BMP, the inspection form on which an issue is identified, and a description of the necessary maintenance, and an indicator of the severity of the issue(s) identified. The second Section of the form is completed by the VHCC Superintendent Buildings and Grounds and identifies who will perform the maintenance, sets a timeframe for performing the maintenance, and a description of the completed maintenance.

2.4 Annual Reporting to DEQ

VHCC must annually report to the DEQ information pertaining to its Post-Construction Stormwater Management efforts. Reporting requirements include the submittal of VHCC's Post-Construction Stormwater Management BMP electronic database that includes the following information (the database provided in Appendix B):

1. The stormwater management facility type;
2. A general description of the facility's location, including the address or latitude and longitude;
3. The acres treated by the facility, including total acres, as well as the breakdown of pervious and impervious acres;
4. The date the facility was brought online (MM/YYYY). If the date is not known, the operator shall use June 30, 2005, as the date brought online for all previously existing stormwater management facilities;
5. The sixth order hydrologic unit code (HUC) in which the stormwater management facility is located;
6. The name of any impaired water segments within each HUC listed in the 2010 §305(b)/303(d) Water Quality Assessment Integrated Report to which the stormwater management facility discharges;
7. Whether the stormwater management facility is publically-owned or privately-owned;
8. Whether a maintenance agreement exists if the stormwater management facility is privately owned;
9. The date of the operator's most recent inspection of the stormwater management facility; and
10. Annually track and report the total number of inspections completed and, when applicable, the number of enforcement actions taken to ensure long-term maintenance.

3.0 INSPECTION FREQUENCY

The General Permit requires an annual inspection of all stormwater management facilities. In addition to the annual inspections, the Virginia Stormwater Management Program and regulations require a stormwater facility inspection after any storm event that exceeds the principal spillway, or more specifically, whenever the emergency spillway is engaged.

Further, the inspection frequency may vary for a specific BMP if additional inspections are prescribed on the construction record drawings. This is often times the case for the first year of a newly constructed BMP to ensure stabilization takes hold and any necessary plantings survive. Inspections must be documented utilizing the appropriate form in Appendix C-1.

4.0 STORMWATER MANAGEMENT FACILITIES

This section describes the types of BMPs found on the VHCC campus and their general layout and function. If additional BMPs are added to the campus that differ in type, the manual will require updates to assist with compliance in accordance with Section 2.3 of this manual. Updates should be incorporated into the Manual within 1-year of the installation of the new BMP type.

There is currently one type of BMP on the VHCC campus. A discussion of the facility type is included in the following section. Inventory of individual BMPs at the VHCC campus are listed in Appendix B

4.1.1 Dry Detention

These basins have at least one inflow channel, an embankment/dam, a bottom level orifice, sometimes a riser in the basin, a principal spillway structure to route drainage through the dam, and an outlet structure. These basins do not have a normal pool, and remain dry except during and shortly after storm events. Some extended detention facilities may have a wet marsh with plantings in the bottom for additional pollutant removal. On rare occasions the extended detention basin may be designed to have a wet normal pool, in which case plan verify to assure it isn't due to a blockage.

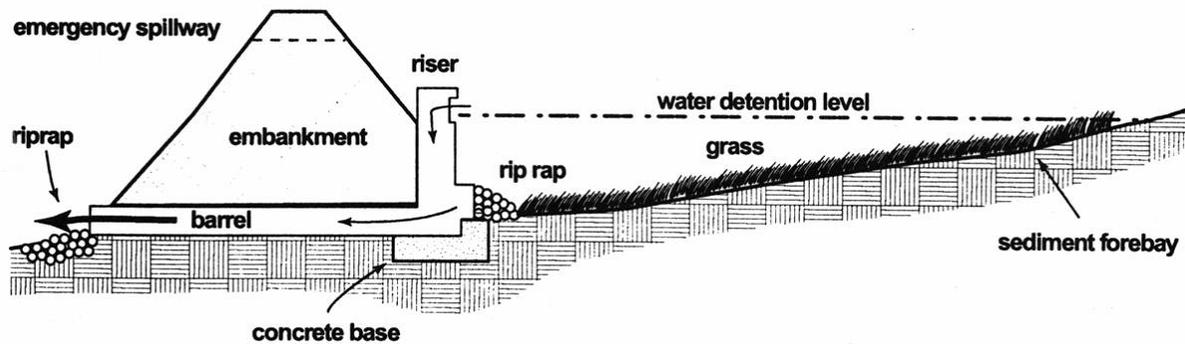


Figure 2: Typical Dry Detention Basin Schematic.

5.0 BMP INSPECTION FORMS

BMP inspection forms are an integral part of the Post-Construction Stormwater Management Program and provide documentation to demonstrate compliance to the General Permit requirements. The following sections are intended to provide guidance when completing the BMP inspection form located in Appendix C-1.

5.1 Stormwater Management Facility Information

The following describes the general information required on the inspection form in Appendix C-1.

- “Owner”: VHCC
- “Facility ID #”: This is the facility identification # as identified on Post-Construction Stormwater Inventory Map provided in Appendix A of this Manual.
- “Inspection Date”: The date the inspection is taking place.
- “As-Built Plans Available”: Are the original As-Built plans available for reference? Indicate yes or no.
- “Date of Last Inspection”: The date the last inspection of the facility. This information should be maintained on file and in the BMP inventory database.
- “Inspector(s)”: The name of the inspector performing the inspection.
- Determination if maintenance was required and performed that stemmed from a previous inspection. The inspector should be able to obtain and review the previous inspection form. During the current inspection, the inspector should be able to determine if previous maintenance items have been addressed.
- Determination of if maintenance is needed based on the current inspection. Maintenance would typically be required if “Yes” is selected for any of the issues on the form. In this case, a BMP Maintenance Follow-up Form should be submitted to the Superintendent Buildings and Grounds.

5.2 Inspection Elements

The inspection form is designed so that individual elements of the stormwater facility are inspected for the occurrence of typical issues. For each element issue, the inspector indicates a “yes,” “no,” or “N/A.” Where “yes” is indicated, the corresponding corrective action identified on the form needs to be scheduled. Proper evaluation of element issues is critical to identify maintenance needs and therefore preserve proper functionality of the BMP. The notes section of the form can be utilized to indicate the severity of maintenance needs. The following sections define and describe each component of the Inspection Form.

5.2.1 Contributing Drainage Area

The contributing drainage area includes any area that drains to the facility, both onsite and offsite. These areas should be examined as a potential source of trash, debris, or erosion if any of these are within the facility. Eliminating the source of the issue is essential and works as a preventative measure to ensure long term functionality of the BMP.

5.2.2 Pretreatment

Pretreatment is the initial structure or measure through which stormwater runoff is routed before it enters the BMP. It serves as a preliminary filter, or trap, to remove silt and sediment that could reduce the pollutant removal efficiency of the BMP. As a result, the pretreatment structures or measures require clean out more often than the facility itself. If there are significant amounts of sediment in the pretreatment structure, it should be removed to maintain its function and to prevent the sediment from being re-suspended in runoff and conveyed to the BMP and subsequently downstream to the receiving waters.

5.2.3 Inlets

Inlets, such as drop inlets and curb inlets, route runoff through the storm sewer and into BMPs for treatment from the contributing drainage area. The inspector should determine if sediment, trash, or other obstructions are preventing flow from being conveyed to the BMP.

5.2.4 Sediment Forebay

A sediment forebay is a pretreatment structure that traps debris, trash, sediment and other pollutants from entering the BMP. Sediment must be cleaned out once the level in the forebay reaches 50% of the capacity. This can be measured by placing a marked stake in the forebay with the marking indicating the 50% level. The marker is useful since the forebay may often maintain a wet pool. Excessive sediment accumulation may also indicate exposed soils within the drainage area to the BMP that require stabilization.

5.2.5 Vegetation

For certain BMPs, such as constructed wetlands, the planting plan serves as a component of the design. Vegetation assists with filtering and biological uptake of pollutants, and maintaining the plantings is critical to ensure functionality. The BMP vegetation should match the design plans for the number and species of plants present. Having more plants than what is shown on the plans is acceptable as long as it is not an invasive species and/or the overgrowth is not impacting the storage volume and the BMP's ability to drain. Mosquito breeding can also be a concern, especially once cattail matting has become established in the BMP. Therefore, cattails are not a desirable species within a BMP. Considering the general planting location in the facility is also helpful. For example, if there is a section of plants adjacent to a road shoulder that is dying, it may be indicative of contaminated runoff, such as from De-icing operations. Vegetation should be replaced in accordance with the approved plans, acceptable species and quantities from the Virginia BMP Clearinghouse for the BMP type, or as specified by a licensed Landscape Architect or Professional Engineer.

5.2.6 Emergency Spillway

The emergency spillway is a channel that conveys stormwater during large storm events from the BMP to an outfall, usually the same one as the principal spillway or main outlet. It prevents the facility from overtopping during the large storm events. Not all facilities have an emergency spillway. Spillways can be lined with various materials including grass with or without erosion control matting, rip-rap, or concrete, based on the velocity of flows predicted through the spillway. The spillway is usually visible as a low spot a minimum of 1' below the top of embankment off to one side. Consult the design plans for additional details.

5.2.7 BMP Outfall

The BMP outfall is the location where flows are discharged from the BMP. The BMP outfall should discharge into a stabilized receiving channel. At the location where the discharge from the BMP enters the receiving channel, there is typically a riprap stone lining to prevent erosion, otherwise known as outlet protection. The purpose of many stormwater facilities is to protect the downstream channels, and thus an evaluation of the outfall and the channel immediately downstream should be conducted to determine if erosion is occurring.

5.2.8 Principle Spillway

The principle spillway is the structure that controls how much flow exits the BMP during more frequent storm events. Flows typically pass through the control structure (e.g. orifice, riser) and subsequently through a culvert that passes through an embankment, if present. The principle spillway is used in most storm events, unlike the emergency spillway, which is only used during very large events. Because this is typically the only conveyance through the embankment, the functionality and structural integrity of the principle spillway is critical. Often, a riser may serve as the principal spillway and connect the discharge culvert to convey flows to the BMP outfall. The riser usually has a small opening, or orifice, that controls the amount of flow through the system. Thus, the functionality of the riser can have a large impact on the water level in the basin, and meeting the designed pollutant removal. Larger storms may spill over the top of the riser through a grate, so inspection should ensure the top of the riser is free from obstruction as well as any orifices in the structure. Damage or deterioration can take the form of rust, cracking, exposed rebar, or additional holes in the structure.

5.2.9 Berm/Embankment

The embankment or berm is the fill section that detains runoff within the facility. The face of the dam is the front side that interacts with the water level and the top, or crown, is the highest flat surface. The downstream side is the back of the dam from the top down to where the fill section meets the natural grade (called the “toe” of the dam), typically just below the outfall. Basins outlet on the downstream side, which can be a more problematic area due to the effects of water pressure and saturation on the face and through the embankment. Trees should not be allowed to grow in the embankment since their root systems can affect the structural integrity. A dug basin, however, will not have all of these components since it is excavated into the existing earth and not created by fill placement. Additionally, roadways are not considered embankments because they typically have culvert pipes through them to convey stormwater effectively, but are not designed as a stormwater facilities to actually detain flows behind them.

Issues with the embankment can be critical to the function of the facility, downstream safety, as well as environmental concerns in the case of a failure.

5.2.10 Low Flow Orifice

The low flow orifice is the smaller outflow hole, usually in the riser, that slows the discharge from the pond, protecting against downstream erosion. It also provides residence time for the runoff within the facility, so that processes such as settling can occur. The low flow orifice tends to clog because of its size and will typically have a trash rack on the front of it.

5.2.11 Miscellaneous

This section captures any other pertinent features or issues of the facility not otherwise addressed in the checklist. Issues may be identified in the footprint area and with general issues such as difficulty in accessing the BMP. Note any of the criteria needing repair, and include applicable location information for reporting.

6.0 FACILITY MAINTENANCE

The effectiveness of post-construction stormwater control BMPs depends upon regular inspections and maintenance of all aspects of the facility. There are typically two types of BMP maintenance, referred to as routine maintenance and corrective maintenance.

6.1 Routine Maintenance

Routine maintenance consists of preventative measures that are essential to the ongoing care and upkeep of a BMP. These measures are performed regularly to ensure proper function. Additionally, it helps prevent potential nuisances (odors, mosquitoes, weeds, etc.), reduces the need for corrective maintenance, and reduces the chance of polluting stormwater runoff by identifying and repairing problems before they further deteriorate.

Examples of routine maintenance include:

- Removal of any accumulated sediment from the forebays;
- Replacement of plantings or vegetation called for in the approved plans that have died or are diseased;
- Repair of the stormwater structures for erosion or undercutting;
- Repair of any erosion in the facility, including sloughing, animal burrows and slopes;
- Repair of any deterioration at the outfall of the facility, including the riprap outlet protection;
- Removal of blockages of all trash racks, inlets and outlets;
- Maintenance of adequate access to the facility and remove of woody vegetation as needed;
- Removal of trees from embankments.
- Exercise of valves to prevent them from locking up where applicable; or
- Removal all trash, debris and floatables periodically from the facility.

6.2 Corrective Maintenance

Corrective maintenance is any maintenance that should be addressed for the facility to properly function in accordance with the plans. These items require more intensive repair efforts and should be addressed as a higher priority than routine maintenance. If there are structural deficiencies, or issues that raise the water level in the facility beyond the design intentions, corrective maintenance is required and should be conducted as soon as possible to prevent downstream damage to properties and/or the environment.

Examples of Corrective Maintenance include:

- Repair of any deterioration or issues with the principal spillway and riser, such as evidence of spalling, joint failure, leakage, corrosion, etc.
- Extensive sediment removal when inspections indicate that 50% of the forebay sediment storage capacity has been filled.
- Control or removal of invasive species when their coverage exceeds 15% of a wetland cell while taking care to preserve the designed plantings and vegetation.
- Removal of woody vegetation removed from the embankment, if present, to prevent structural damage.
- Removal of plant growth if there are impacts to the storage volume (i.e. water levels rise because the vegetation is taking up the water storage space).

7.0 FACILITY MAINTENANCE

The effectiveness of post-construction stormwater control BMPs depends upon regular inspections and maintenance of all aspects of the facility. There are typically two types of BMP maintenance, referred to as routine maintenance and corrective maintenance.

7.1 Routine Maintenance

Routine maintenance consists of preventative measures that are essential to the ongoing care and upkeep of a BMP. These measures are performed regularly to ensure proper function. Additionally, it helps prevent potential nuisances (odors, mosquitoes, weeds, etc.), reduces the need for corrective maintenance, and reduces the chance of polluting stormwater runoff by identifying and repairing problems before they further deteriorate.

Examples of routine maintenance include:

- Removal of any accumulated sediment from the forebays;
- Replacement of plantings or vegetation called for in the approved plans that have died or are diseased;
- Repair of the stormwater structures for erosion or undercutting;
- Repair of any erosion in the facility, including sloughing, animal burrows and slopes;
- Repair of any deterioration at the outfall of the facility, including the riprap outlet protection;
- Removal of blockages of all trash racks, inlets and outlets;
- Maintenance of adequate access to the facility and remove of woody vegetation as needed;
- Removal of trees from embankments.
- Exercise of valves to prevent them from locking up where applicable; or
- Removal all trash, debris and floatables periodically from the facility.

7.2 Corrective Maintenance

Corrective maintenance is any maintenance that should be addressed for the facility to properly function in accordance with the plans. These items require more intensive repair efforts and should be addressed as a higher priority than routine maintenance. If there are structural deficiencies, or issues that raise the water level in the facility beyond the design intentions, corrective maintenance is required.

Examples of Corrective Maintenance include:

- Repair of any deterioration or issues with the principal spillway and riser, such as evidence of spalling, joint failure, leakage, corrosion, etc.
- Extensive sediment removal when inspections indicate that 50% of the forebay sediment storage capacity has been filled.
- Control or removal of invasive species when their coverage exceeds 15% of a wetland cell while taking care to preserve the designed plantings and vegetation.
- Removal of woody vegetation removed from the embankment, if present, to prevent structural damage.
- Removal of plant growth if there are impacts to the storage volume (i.e. water levels rise because the vegetation is taking up the water storage space).

Further information on maintenance recommendations for various types of BMPs can be found at the Virginia BMP Clearinghouse at: <http://www.vwrrc.vt.edu/swc/NonProprietaryBMPs.html>

Appendix A: VHCC Post-Construction Stormwater Facility Mapping

LEGEND

BUILDING GUIDE

- (A) MAINTENANCE BUILDING
- (B) GREENHOUSE
- (C) NURSING EDUCATION BUILDING
- (D) ADMINISTRATION BUILDING
- (E) TECHNICAL CENTER
- (F) LEARNING CENTER
- (G) MECHANICAL ED. BUILDING
- (H) HEARTWOOD BUILDING
- (I) HIGHER EDUCATION BUILDING

STORMWATER FACILITY GUIDE

- 1 2 3 DRY DETENTION POND
- 4 5

- - - STORM SEWER
- - - SURFACE WATER



VIRGINIA HIGHLANDS COMMUNITY COLLEGE
ABINGDON, VIRGINIA
POST-CONSTRUCTION STORMWATER INVENTORY MAP



Appendix B: VHCC Post-Construction Stormwater Facility Inventory

Virginia Highlands Community College Stormwater Facility Inventory

Facility ID	Latitude	Longitude	Type or Facility	Total Acres Treated	Pervious Area (Acres)	Impervious Area (Acres)	Date Facility Brought Online	HUC	Receiving Water Impaired (2010 303(d)/305(b))	Publically or Privately Owned?	Does a Maintenance Agreement Exist?	Date of last Inspection	# Inspections Completed During Reporting Year
VHCC-SWM-1	36°41'57.6"N	82°00'20.6"W	Dry Detention Basin	31.8	25.2	6.6	6/30/2005	TH16	No	Public	N/A	N/A	N/A
VHCC-SWM-2	36°41'55.9"N	82°00'14.4"W	Dry Detention Basin	2.9	2.5	0.4	6/30/2005	TH16	No	Public	N/A	N/A	N/A
VHCC-SWM-3	36°42'02.0"N	82°00'02.8"W	Dry Detention Basin	5.5	1.7	3.8	6/30/2005	TH16	No	Public	N/A	N/A	N/A
VHCC-SWM-4	36°41'47.8"N	81°59'54.5"W	Dry Detention Basin	2.3	0	2.3	6/30/2005	TH16	No	Public	N/A	N/A	N/A

Appendix C-1: Stormwater Facility Inspection Forms

Virginia Highlands Community College
 BMP Operation & Maintenance Inspection for
 Detention, Retention and Extended Detention Basins

Owner Name: JTCC	Facility ID # (See Mapping):
Date of Inspection:	As-built plans available: Y N
Date of Last Inspection:	Inspector:
Were issues identified during the previous inspection that required maintenance?	Y N
If so, was the maintenance performed and recorded on a BMP Maintenance Follow-up Form?	Y N
If no, explain:	
Does the current inspection, as summarized hereon, identified maintenance needs?	Y N
If yes, please complete a BMP Maintenance Follow-up Form and provide to the Director of Facilities upon completion.	

BMP Element	Issue	Yes	No	N/A	Corrective Action
Contributing Drainage Area	Excessive trash/debris				Remove trash/debris and properly dispose.
	Bare exposed soil				Stabilize with seed and mulch. E&S measures may be warranted until stabilized.
	Evidence of erosion				Backfill area, seed, mulch and consider matting. E&S measures may be warranted until stabilized.
	Excessive landscape waste/yard clippings				Remove landscape waste and yard clippings to prevent clogging and properly dispose of them.
Pretreatment / Forebay / Inflow	Excessive trash/debris/sediment or other blockage				Remove trash/debris/sediment or blockages and properly dispose of.
	Dead vegetation, exposed soil				Replace vegetation and stabilize according to plans. E&S measures may be warranted until stabilized.
	Evidence of erosion, undercutting, or bare soils				Backfill area, seed, mulch and consider matting, E&S measures may be warranted until stabilized.
	Structural deterioration of inlets, outfalls or pretreatment overflow weirs into the facility				Repair and restabilize area. Consult plans for approved configuration or an engineer. E&S measures may be warranted until stabilized.
	Animal burrows				Fill in immediately and stabilize.
Aquatic Bench / Vegetation	Plantings inconsistent with approved plans.				Consult approved plans and/or management to ensure no approved plant substitutions were used. Remove unapproved plants and replace any required plantings in kind.
	Dead vegetation/exposed soil				Replace vegetation and stabilize according to plans. E&S measures may be warranted until stabilized.
	Invasive plants, such as cattails and phragmites, exceeds 15% of the planted area.				Invasive plants should be removed immediately. Vegetation may require periodic harvesting for proper long term management.

Berm/ Embankment	Overgrown, including woody growth 5' beyond the outfall pipe and/or embankment.			Removal of woody species near or on the embankment is critical for proper function and long term stability. Remove all woody growth including stumps. Consult an engineer for backfill specifications. Mow thick growth.
	There is sparse vegetative cover and erosion channels are present.			Backfill area with structural fill and consult engineer for proper specifications. Stabilize with seed and mulch, consider matting. E&S measures may be warranted until stabilized.
	Cracking, bulging, sloughing and seepage			Consult an engineer immediately to prevent failure.
	Evidence of animal burrows.			Fill in immediately and stabilize.
Riser	Structural condition of the riser is deteriorating.			Consult an engineer to recommend a repair and review the approved plans.
	Adjustable control valve inaccessible and inoperable (if present).			Repair valve to be operational.
	Pieces of the riser are broken or missing.			Repair immediately in accordance with the approved plans. Consult an engineer as needed.
	Riser or low flow orifice is blocked.			Remove blockage and properly dispose of.
	Riser provides inadequate conveyance out of facility.			Repair to properly convey drainage to the outfall per the approved plan. Consult an engineer as needed.
	Evidence of erosion or undermining at/around riser.			Repair erosion. Consult engineer for structural repairs as needed.
Structural deterioration			Consult engineer for proper repair procedures.	
Outlet / Outfall	Exposed rebar, joint failure, loss of joint material, misalignment, leaking or corrosion			Repair concrete to cover rebar. Consult engineer for all other structural repairs.
	Excessive trash/debris/sediment or blockages.			Remove trash/debris/sediment/blockages and properly dispose of.
	Evidence of erosion and bare soil.			Backfill area, seed, mulch and consider matting, E&S measures may be warranted until stabilized.
	Valves, manholes or locks cannot be opened or operated (if present).			Repair/replace any broken fixtures.
	Erosion of outfall channel or riprap deterioration.			Repair and/or supplement riprap outlet protection in accordance with the approved plans.
	Outlets provide inadequate conveyance out of facility.			Repair to properly convey drainage to the outfall per the approved plan. Consult an engineer as needed.
Overall	Access to the facility is in need of repair.			Restore access for maintenance equipment per the approved plans.
	Encroachment on facility or easement by buildings or other structures.			Contact Operations and Maintenance or Plant Services Division
	Evidence of oil/chemical accumulation, odor, algae, color or pollution.			Report to management and consult IDDE manual.
	Fences and/or safety signage is inadequate.			Repair fences and signage for public safety.
	Trash in the pool			Remove immediately and observe safety procedures.
	Additional notes:			

Appendix C-2: BMP Maintenance Follow-up Form

BMP Maintenance Follow-up FORM

To be completed by inspector

Campus: _____ BMP ID # (see campus BMP Inventory map): _____

Was the maintenance need generated from an inspection? _____ If yes, date on inspection form: _____

Description of required maintenance: _____

Is maintenance critical to the function of the BMP? Yes No Not sure

To be completed by the Director of Facilities

Individual performing or overseeing maintenance: _____

Requested date for maintenance to be completed by: _____

Date(s) maintenance completed: _____

Did maintenance solve the identified problem? Yes No Not sure

If no or not sure, describe further necessary maintenance and a date for the additional maintenance to be performed:

Description of maintenance performed: _____

Attach photographs to this form and retain for records.

Appendix D: New Stormwater Facility Form



Virginia Highlands Community College
New BMP Inventory Form

Owner Name:		
Property Address:		
Street:		
City:		
Zip Code:		
Facility Type:		
Date BMP placed in service:	Latitude:	Longitude:
Site plan/permit number:	As-built plans available:	Y N
Date of Last Inspection:	Inspector:	
Inspector Contact Information:		